


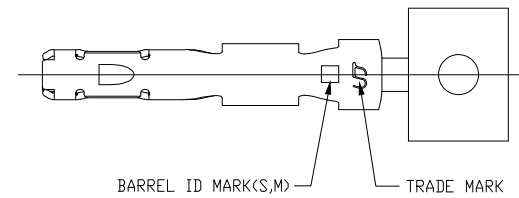
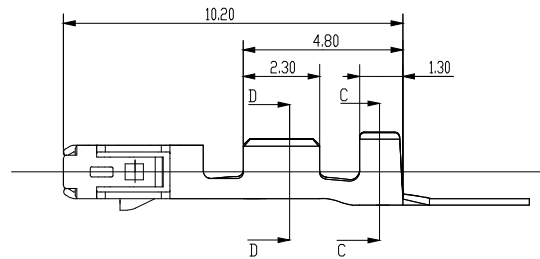



ISO VIEW

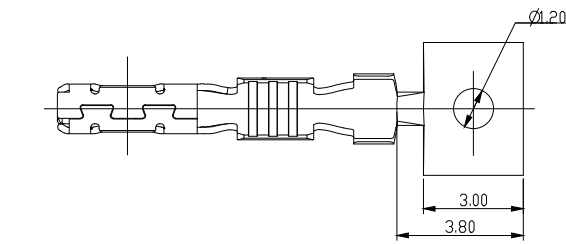

REV	REVISION RECORD	DATE	DRWN	APVD
B1	REVISED	24DEC '15	CH	SJ
C	REVISED(RD-2017-024)	18APR'17	KH	SJ
D	REVISED(RD-2017-082)	13NOV'17	KH	SJ



SECTION C-C  
SCALE 10:1



SECTION D-D  
SCALE 10:1

- NOTES  
 1. GENERAL TOLERANCE : ±0.2, ±3°  
 2. APPLICABLE WIRE RANGE :

PART NO.	Conductor		Insulation Diameter	
	Nominal Size (mm <sup>2</sup> )	Outer Diameter (mm)	Minimum(mm)	Maximum(mm)
ⓑ KH1200030-22	0.5	1.0~1.1	1.4	1.6
ⓑ KH1200030-21	0.3~0.35	0.8~0.9	1.2	1.5

3. APPLICATOR FEED : 5.5mm

Ⓒ	2.2	2.1	1.80	1.85	0.3~0.35	020 REC(M)-AU	KH1200030-31	COPPER ALLOY	PRE-Au
ⓑ	2.3	2.3	2.0	2.0	0.5	020 REC(L)	KH1200030-22		PRE-TIN
Ⓐ	2.2	2.1	1.80	1.85	0.3~0.35	020 REC(M)	KH1200030-21		
ⓓ	C	ⓑ	A		APPLICABLE WIRE RANGE	DESCRIPTION	PART NO.	MATERIAL	FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED	
0	±
0.0	±
0.00	±
0.000	±
0.0000	±
ANGLES	±
PRODUCT SPEC	-

UNIT MM	
THIRD ANGLE PROJECTION	
APPLICATION SPEC	-

DRWN KH.PARK	NAME
CHKD YD.LEE	
APVD S.J.SONG	
MATERIAL	
FINISH/COLOR	SEE TABLE
WEIGHT	-

(주)우주 일렉트로닉스 UJU Electronics co.,Ltd.		020 FEMALE TERMINAL			
		CUSTOMER	DRAWING NO		
DRAWING		KH1200030			
LDC	RESTRICTED TO	SIZE	SCALE	SHEET	
		A3	5:1	1 of 1	
		REV D			