







Unwinding direction off top of reel

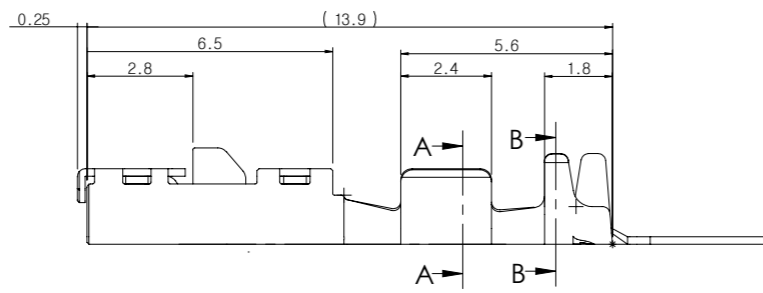



3D View



SECTION A-A



SECTION B-B

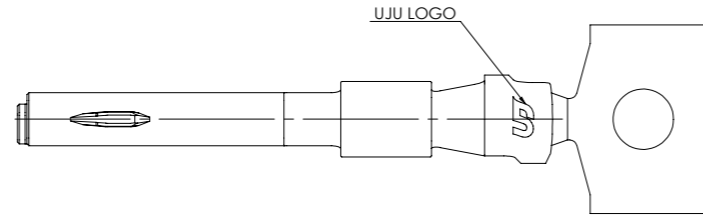

-Note-

1. Material : P26R-H (T=0.20)
2. General Tolerance : see blow
3. Finish (Tin) : Pre-Tin 0.8~1.5µm over Copper 0.5µm Min.
4. Finish (Au) : Pre-Au 0.38µm Min. (Spot) Tin 2.0~4.0µm over Nickel 0.8~2.0µm
5. No burr permitted, round outer edge : R0.05 Max.
6. Remove Burrs, Break sharp edges
7. Camber 15mm/1000mm, Twist 90°/1000mm
8. No Crack
9. Barrel swage edges without burrs
10. Insertion force (Only first piece inspection) : 150~250gf

2.75	2.55	0.75	2.1	2	0.4	Φ1.4~1.7	0.3~0.5SQ	025 II REC(M)	KH2000016-21	3
2.3	2.2	0.5	1.6	1.5	0.4	Φ1.0~1.05	0.22SQ	025 II REC(S)	KH2000016-20	3
F	E	RD	C	B	RA	Insulation Range	Wire Range	Description	Part No.	Finish

GENERAL TOLERANCE									
	10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
A	±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'

A	RELEASED (RD-2021-097)	29 JUN'21	WJ	KH	CY
REV	REVISION RECORD	DATE	DRWN	CHKD	APVD

STOCK THK.	0.20 ±0.01 × 25.9 ±0.05 WIDE
TRIMMING BURR	0.03mm MAX.
WIRE CRIMP	SEE TABLE
DIE FEED	-
WIRE RANGE	SEE TABLE
INSUL RANGE	SEE TABLE
WIRE CRIMP	SEE TABLE
INS CRIMP	SEE TABLE
APPL FEED	-
WIRE CRIMP	SEE TABLE
INS CRIMP	SEE TABLE
APPL FEED	-
WIRE CRIMP	SEE TABLE
INS CRIMP	SEE TABLE
APPL FEED	-

CONTROL PRIORITY DIMENSION	■ CRITICAL □ MAJOR □ MINOR
TOLERANCES UNLESS OTHERWISE SPECIFIED	0 ±0.05 0.0 ±0.05 0.00 ±0.05 0.00 ±0.05 0.00 ±0.05 ANGLES ±
UNIT	MM
THIRD ANGLE PROJECTION	

DRWN	WJ.CHO	CHKD	KH.PARK	APVD	CY.CHOI	
MATERIAL	SEE TABLE	(주)우주 일렉트로닉스 UJU Electronics co.,Ltd.				
FINISH/COLOR	SEE TABLE					
NAME	025 II Female Terminal					
LOC	A3	SCALE	5:1	SHEET	1 OF 1	
DRAWING NO	KH2000016				REV	A