





TPA LOCKING POSITION

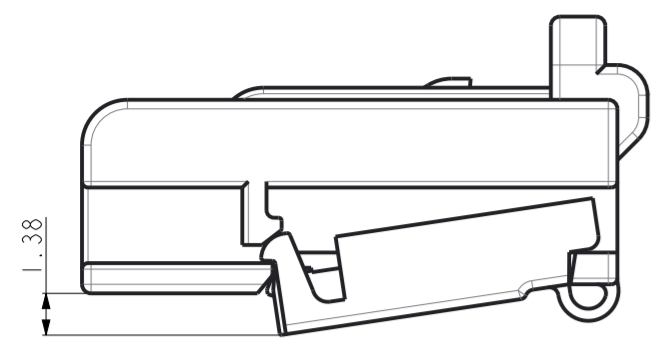


1st LOCK POSITION  
(DELIVERY SHAPE FOR CUSTOMER)

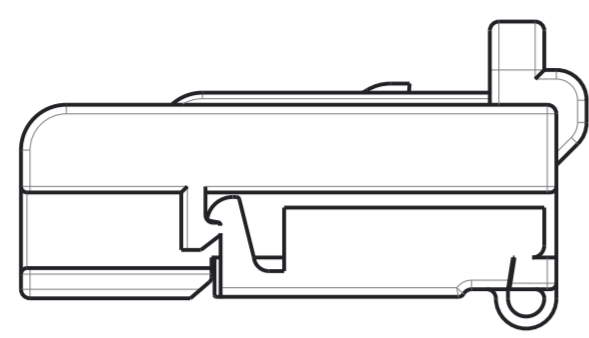

2nd LOCK POSITION

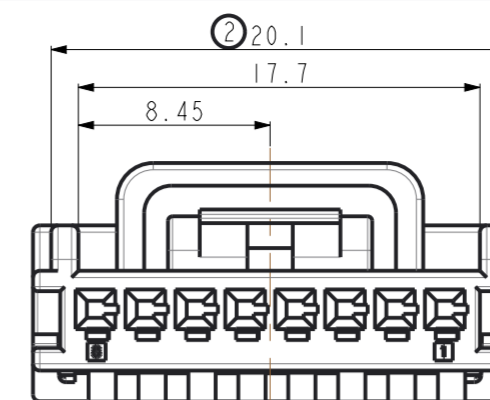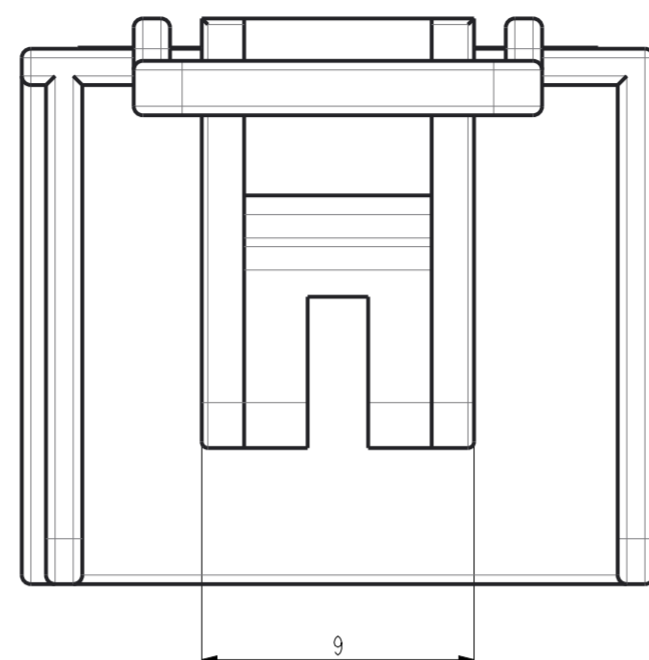


CODE A  
(SCALE 3:1)



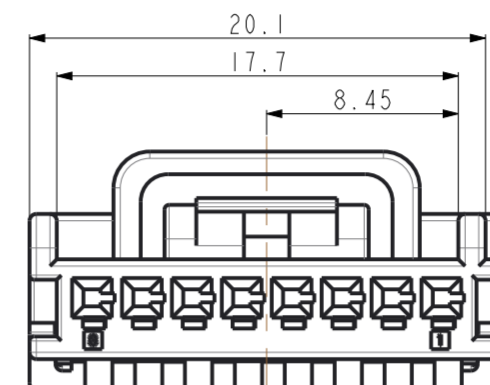


CODE B  
(SCALE 3:1)

REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED (RD-2019-041)	15MAR'19	HS	SH	CY

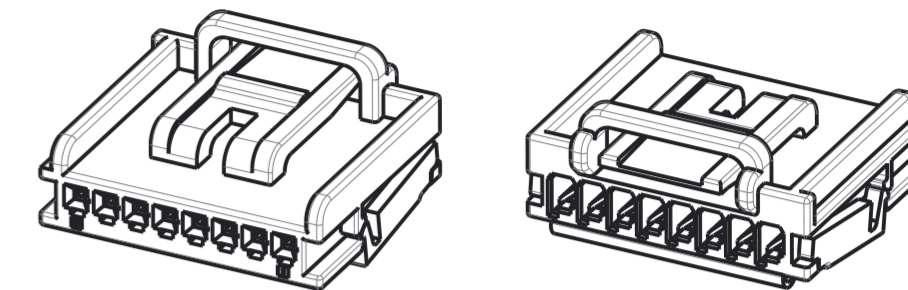

ISO VIEW  
(SCALE 2:1)

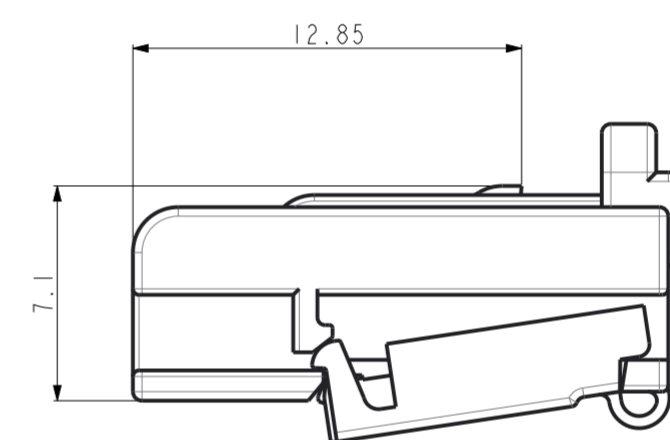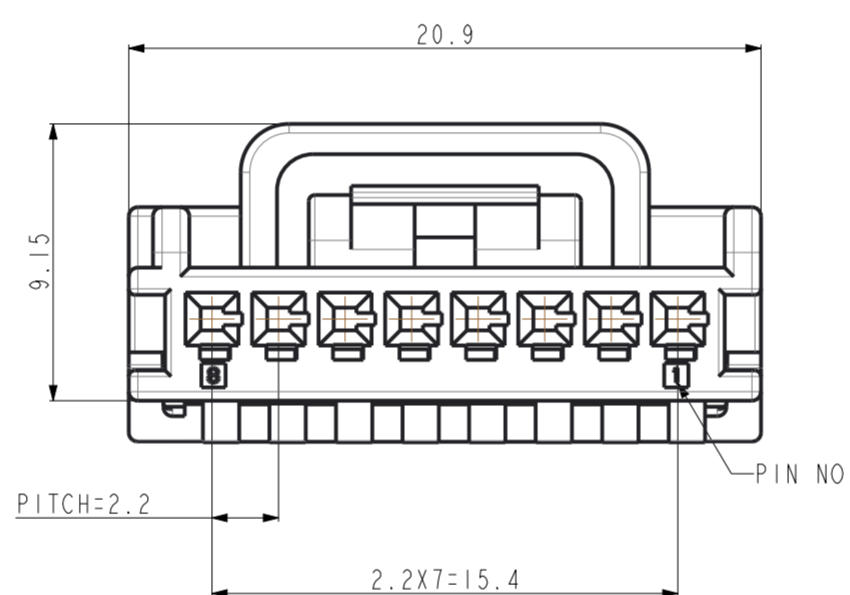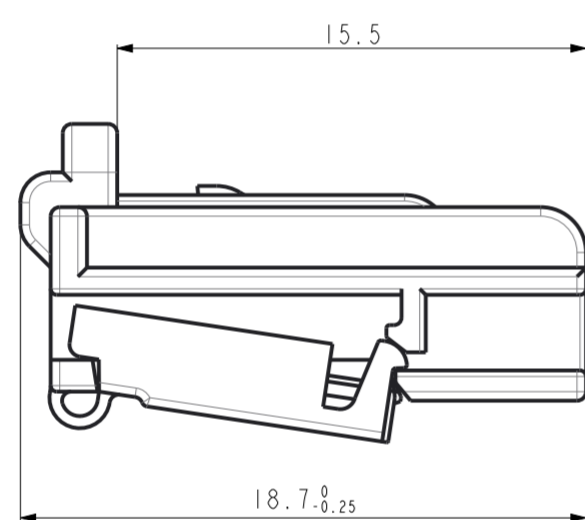


TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±0.5°

TABLE-1

DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR
025_D_8F_ASSY	KHI800058-10	A	PBT	NATURAL
	KHI800058-21	B		BLACK

TABLE-2

DESCRIPTION	PART NO.	WIRE RANGE	MATERIAL	FINISH
025_D_FEMALE_TERMINAL	KHI800045-21	0.3 ~ 0.5 SQ	COPPER ALLOY	PRE-TIN

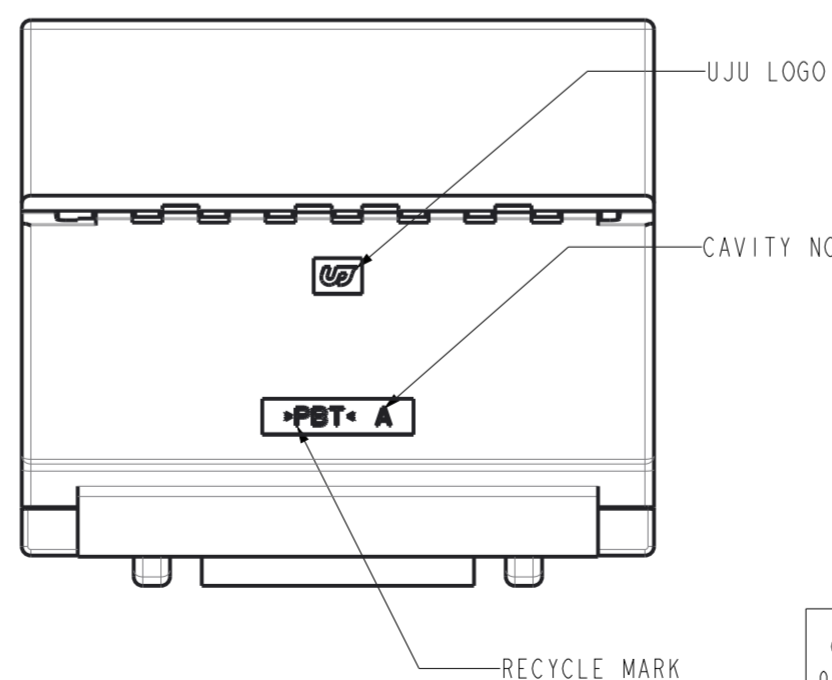

NOTE

1. GENERAL TOLERANCE : SEE TABLE TOLERANCE
2. DELIVERY CONDITION : TPA FIRST LOCK POSITION
3. HSG DESCRIPTION : SEE TABLE-1
4. APPLICABLE RECEPTACLE TERMINAL : TABLE-2
5. REFERENCE MATING CONNECTOR IS KHI300038 OR KHI300055

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNIT MM	DRWN	(주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
		THIRD ANGLE PROJECTION	CHRD	NAME		
0 ±		APVD	025_D_8F_ASSY			
0.0 ±		CY.CHOI	MATERIAL	SEE TABLE-1		
0.00 ±	PRODUCT SPEC	RESTRICTED TO	WEIGHT	CUSTOMER DRAWING	DRAWING NO	
0.000 ±	APPLICATION SPEC	LOC	SIZE	SCALE	SHEET	REV
0.0000 ±			A2	4:1	1 OF 1	A
ANGLES ±						