

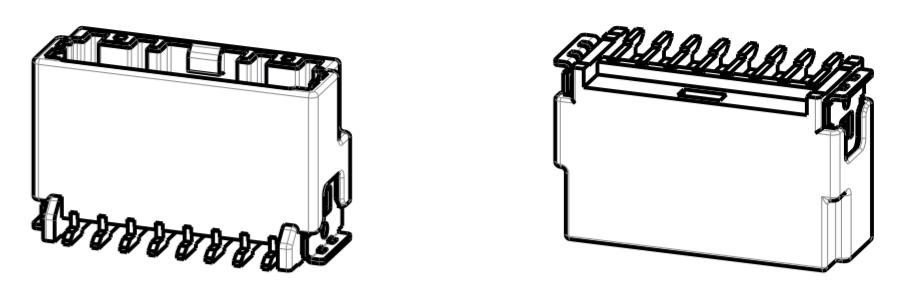
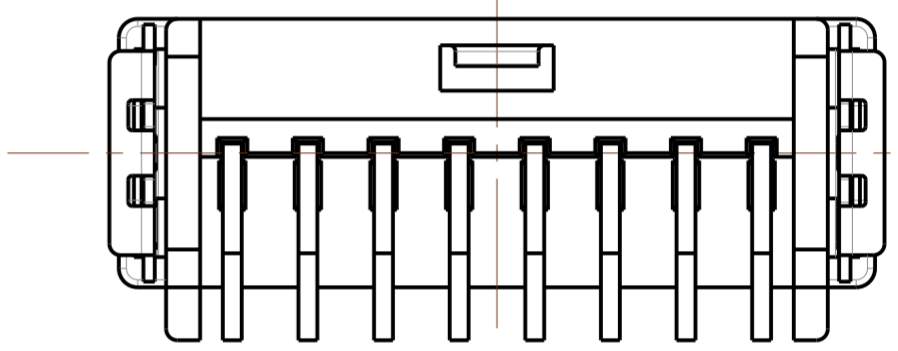


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED	22.NOV'19	DR	KH	CY
B	REVISED (RD-2020-024)	25.FEB'20	DR	KH	CY
C	REVISED (RD-2020-140)	23.OCT'20	DR	KH	CY

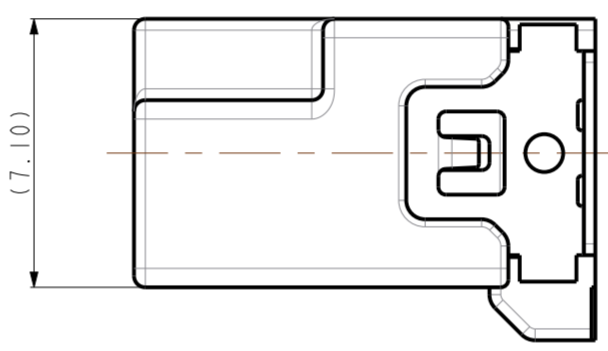


ISO VIEW

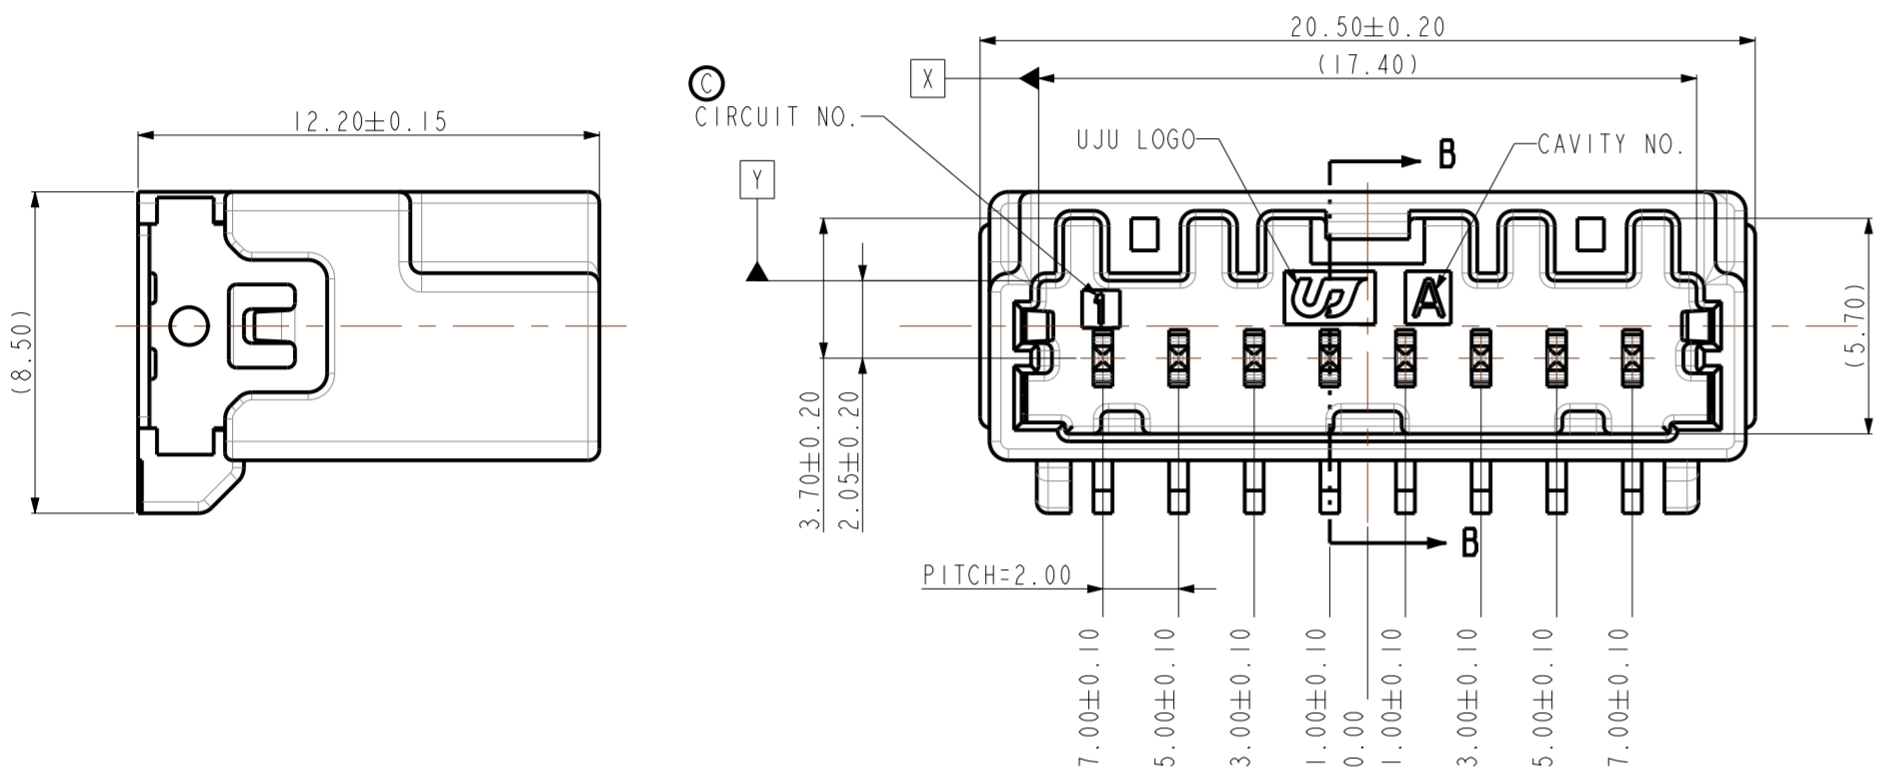


NOTE.



1. GENERAL TOLERANCE : ± 0.3 , $\pm 3.0^\circ$
2. BURR 0.3 MAX.
3. NO CRACK
4. ALL LETTERS SHALL BE CLEAR AND LEGIBLE
5. Δ MEASURING THE DIMENSIONS OF TAB TML AND SOLDER PEG.
6. VACUUM GRIP AREA FREE OF BURR AND FECTOR PINS. MAX ϕ 4.0mm

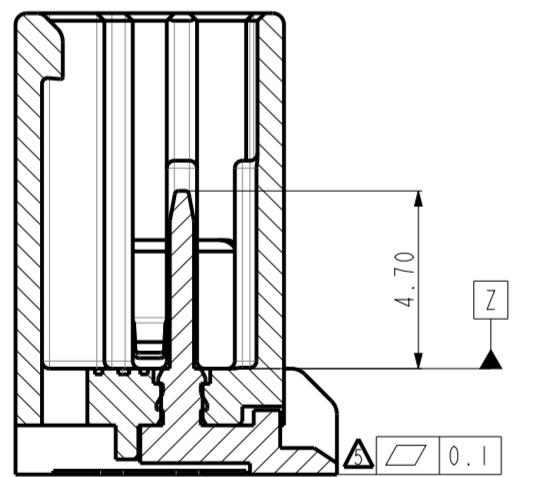

ALL PINS and Solder Peg

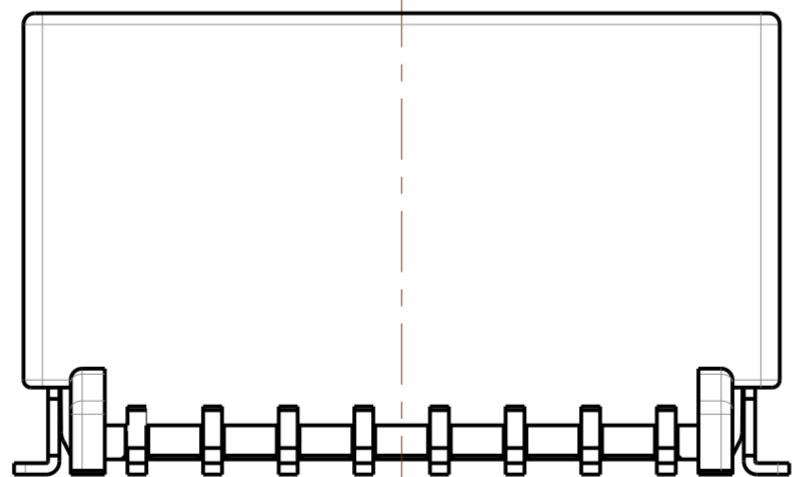


SECTION B-B

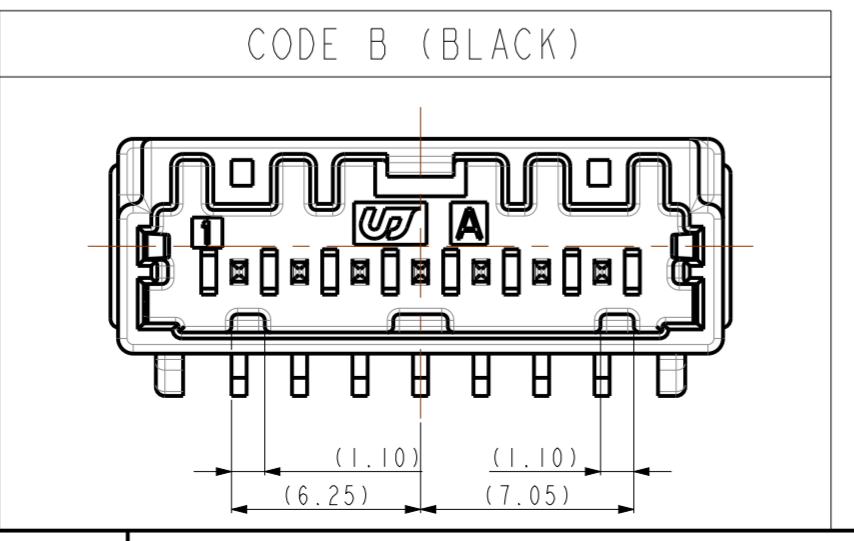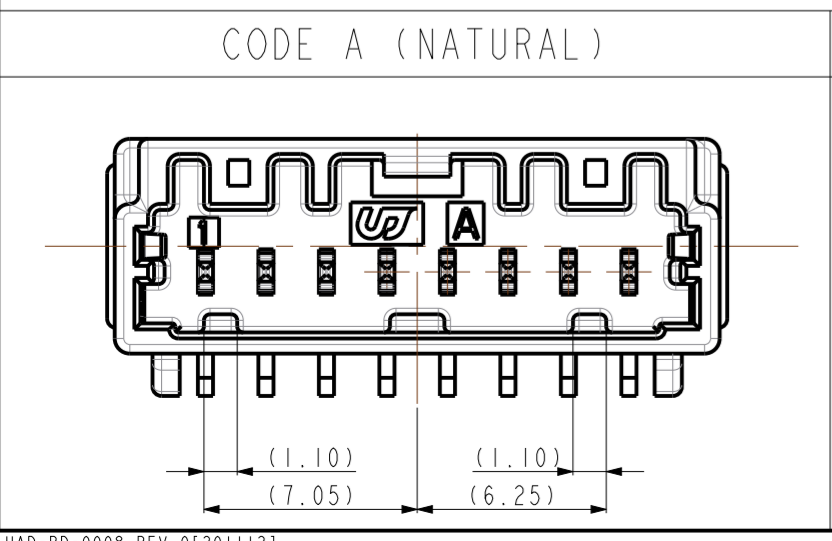

D

C

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNIT MM
0	±
0.0	±
0.00	±
0.000	±
0.0000	±
ANGLES	±
PRODUCT SPEC	APPLICATION SPEC
-	-



DRWN	DR KOO	(주)우주 일렉트로닉스 UJU Electronics co.,Ltd.	NAME			
CHKD	KH PARK		020_D-SMT_8M_V_ASSY			
APVD	CY CHOI		DRAWING NO. KH1800091			
MATERIAL	SEE TABLE	CUSTOMER	DRAWING			
FINISH/COLOR	SEE TABLE	RESTRICTED TO	SIZE	SCALE	SHEET	REV
WEIGHT	-	-	A2	5:1	1 OF 1	C

B

A

NO	DESCRIPTION	MATERIAL	FINISH/COLOR	Q'TY
5	020_D_COVER_HSG_BK	LCP	BLACK	1
4	020 SMT SOLDER PEG-LEFT (VTC)	BRASS	POST-TIN	1
3	020 SMT SOLDER PEG-RIGHT (VTC)	BRASS	POST-TIN	1
2	020 SMT TAB TML (VTC)	BRASS	POST-TIN	8
1	020_D-SMT_8M_V_HSG_BK	PA9T GF30	BLACK	1
	020_D-SMT_8M_V_HSG_NR	PA9T GF30	NATURAL	1